

acucast-H

On the casting system acucast-H the workpieces are fixed in the clamping (arbor). Previously thread onto a guide wire the workpieces are now positioned in the clamping (arbor) on the acucast-H. A compound with a melting point far below 100° Celsius covers the workpieces and cooled by air the compound hardens quickly. This process allows preparing the workpieces fast and easy for the further honing process.

Electrical specification

voltage 110VAC – 240VAC

frequency 50Hz – 60Hz

Air pressure



min. 7 bar

Dimensions (length x width x depth)

1000 x 700 x 1250 mm

Weight

80 kg

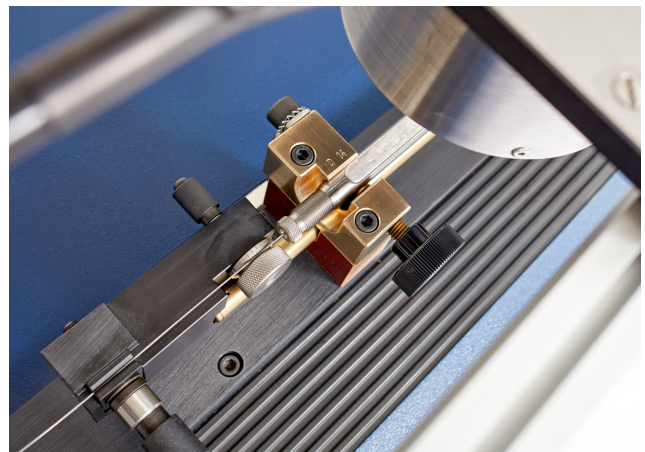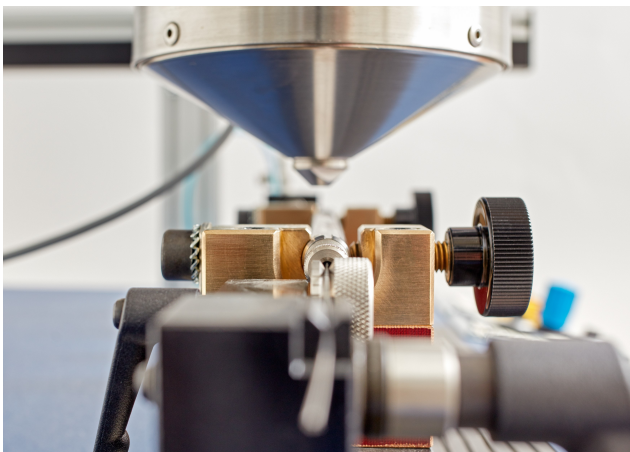



Schläfli Engineering AG
Bahnhofstrasse 22
3294 Büren an der Aare
Schweiz

T +41 32 351 50 70
F +41 32 351 51 05
info@schlafli.com
www.schlafli.com

AVAILABLE ACCESSORIES

OmniFlow - casting compound