

acuwire-H

!! NEW!!! The alternative to the automated honing machines. The manually operated acuwire-H for maximum precision.

Bore size range

up to 2 mm (larger diameters on request available)

Wire length

0 – 3000 mm

Spindle rotation

constant direction or oscillating

Spindle speed adjustment

by potentiometer

Electrical specification

voltage 400 VAC

frequency 50Hz – 60Hz

Dimensions (length x width x depth)

– 3600 x 560 x 1430 mm (Single)

– 3600 x 630 x 1430 mm (Twin)

Other features

illuminated work space


Single oder Twin execution available

Particularly suitable for

workpiece wich geometry is not ideal for the automatic honing machines acuwire-S und acuwire-L

sampling

small to middle lot size

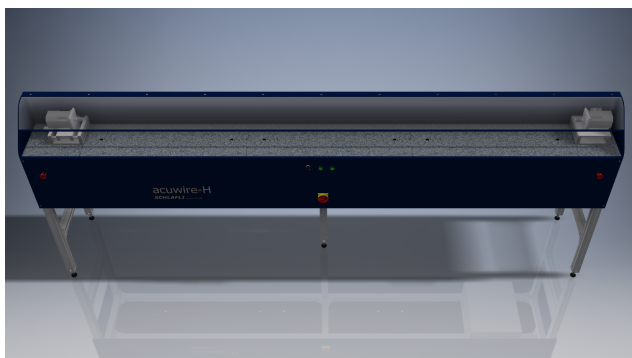

AVAILABLE ACCESSORIES

straight tapered honing wire, entry and final diameter according to customer specification, gradation: 0.001

Diamond suspension in diversen Körnungen

Carbide gauge pins